

中負荷
Medium duty


回轉式系列
Live centers series

> TSC-762 SERIES

高效能回轉頂針

MEDIUM DUTY HIGH PERFORMANCE LIVE CENTER

- ◎ 適用: CNC車床、高速車床及其他機床。
Application CNC lathe, high speed lathe and other lathe
- ◎ 用途: 適用長度300mm以內一般軸心車削加工
Working Usage Applicable for the length less than 300mm ordinary turning process
- ◎ 結構: 採用前後兩個支撐點加止推軸承設計製成。
Structure Combination of thrust bearing and design of front and rear double supporting point
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

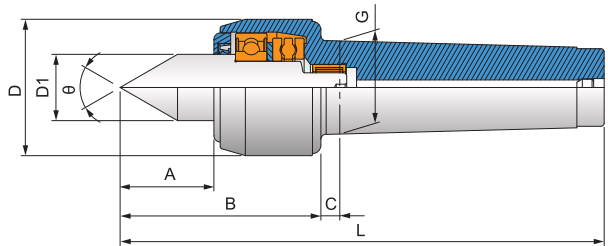

規格 / Specification 單位/UNIT: mm


型式/外表尺寸 Model/Spec	A	B	C	D	D1	G	L	θ	軸承最高轉數 Max. RPM	軸承徑向力 (載重) Max. radial load	軸承軸向力 (推力) Max. axial thrust force
TSC-762-3	45	96	8	58	31.2	23.825(MT3)	183	60°	4,000 rpm	900 kg	2,200 kg
TSC-762-4	45	96	9	65	31.2	31.267(MT4)	204	60°	4,000 rpm	1,100 kg	2,500 kg
TSC-762-5	45	96	9	65	31.2	44.399(MT5)	231	60°	4,000 rpm	1,200 kg	2,500 kg

> TSC-763 SERIES

高效能細長型回轉頂針

MEDIUM DUTY HIGH PERFORMANCE LONG NOSE LIVE CENTER

- ◎ 適用: CNC車床、高速車床及其他機床。
Application CNC lathe, high speed lathe and other lathe
- ◎ 用途: 適用長度300mm以內一般軸心車削加工
(細長型車削加工)。
Working Usage Applicable for the slender workpiece and length less than 300mm ordinary turning process
- ◎ 結構: 採用前後兩個支撐點加止推軸承設計製成。
Structure Combination of thrust bearing and design of front and rear double supporting point
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

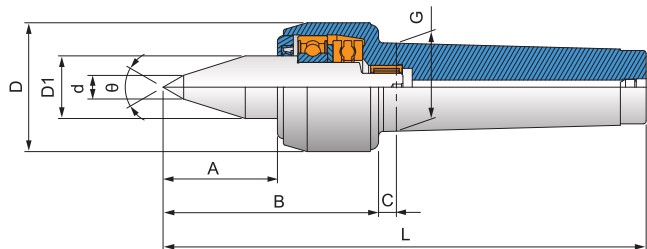

規格 / Specification 單位/UNIT: mm

型式/外表尺寸 Model/Spec	A	B	C	D	D1	d	G	L	θ	軸承最高轉數 Max. RPM	軸承徑向力 (載重) Max. radial load	軸承軸向力 (推力) Max. axial thrust force
TSC-763-3	58	109	8	58	31.2	12	23.825(MT3)	196	60°	4,000 rpm	900 kg	2,200 kg
TSC-763-4	58	109	9	65	31.2	12	31.267(MT4)	217	60°	4,000 rpm	1,100 kg	2,500 kg
TSC-763-5	58	109	9	65	31.2	12	44.399(MT5)	244	60°	4,000 rpm	1,200 kg	2,500 kg