

➤ B SERIES

中空動力夾頭(三爪高速中空型)

3-JAW THOUGH HOLE POWER CHUCK



- ◎ 楔形三爪大貫通孔徑。
- ◎ 摺動面均經硬化及精密研磨，并直接潤滑。
- ◎ 高剛性結構及高夾持精度。
- ◎ It's a WEDGE-HOOK type 3-jaw with the large through-hole.
- ◎ Matching surfaces of all parts hardened, ground and lubricated directly
- ◎ Construction of high rigidity and high clamping accuracy.


規格 Spec 型號 Model	楔心行程(mm) Plunger stroke	爪行程(直徑) Jaw stroke (Dia.) (mm)	夾持直徑 chucking Dia.(mm)		容許油壓缸推力 Max.D.B.Pull (kgf)	最大夾持力 Max clamping force (kgf)	最高回轉速 max r.p.m	慣性矩 kg·m ²	重量 (kg)		適合油壓缸 Matched cylinders
			最大Max	最小Min					Weight		
B-204	10	5.4	110	7	1400	2900	8000	0.01	4		H-0928
B-205 A4			135	12	1750	3650	7000	0.02	6.7	7.5	H-1036
B-206 A5	12	5.5	169	15	2200	5800	6000	0.06	11.9	13.7	H-1246
B-208 A5 A6	16	7.4	210	13	3450	8550	5000	0.18	22.5	25.4	H-1552
										23.6	
B-210 A6 A8	19	8.8	254	31	4350	11300	4200	0.33	34.5	41.5	H-1875
										40	
B-212 A8	23	10.6	304	34	5600	14650	3300	0.77	61	64	H-2091
B-215 A11	23	10.6	381	50	7240	18350	2500	2.39	120	127	H-2511
B-218 A11	23	10.6	450	50	7240	18355	2000	3.74	164	178	H-2511
B-220 A15	23	10.6	510	120	9177	23861	1800	6.91	223	234	ML2816
B-224 A20	26	12	610	150	9177	23861	1400	15.67	270	286	ML3320
B-232 A20	34	18	800	210	10197	24472	1200	43	546	560	ML3320



> B SERIES

中空動力夾頭(三爪高速中空型)

3-JAW THOUGH HOLE POWER CHUCK

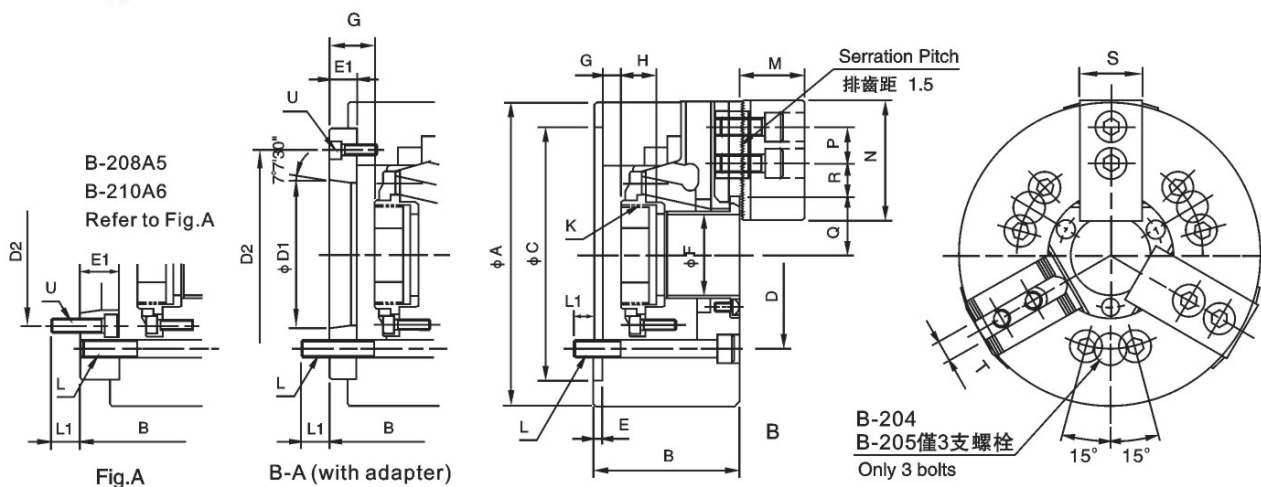

寸法 Size 型號 Model	A	B	C(H6)	D	D1	D2	E	E1	F	Gmax	Gmin	H			
B-204	110	59	85	70.6	-	-	4	-	26	3.5	-6.5	17.5			
B-205 A4	135	60	71	110	82.6	63.51	96	4	15	33	1	16	-9	6	20
B-206 A5	169	81	91	140	104.8	82.56	116	5	15	45	11	26	-1	14	19
B-208 A5	210	91	109	170	133.4	82.56	104.8	5	23	52	14.5	37.5	-1.5	21.5	20.5
B-208 A6	210	91	103	170	133.4	106.38	150	5	17	52	14.5	31.5	-1.5	15.5	20.5
B-210 A6	254	100	120	220	171.5	106.38	133.4	5	25	75	8.5	33.5	-10.5	14.5	25
B-210 A8	254	100	113	220	171.5	139.72	190	5	18	75	8.5	26.5	-10.5	7.5	25
B-212 A8	304	110	122	220	171.5	139.72	190	6	18	91	8	26	-15	3	28
B-215 A11	381	133	149	300	235	196.87	260	6	22	117.5	11	33	-12	10	39
B-218 A11	450	133	149	300	235	196.87	260	6	22	117.5	7	29	-16	6	43
B-220 A15	530	134	155	380	330.2	285.78	330.2	6	27	180	11	38	-12	15	38
B-224 A20	610	147	166	520	463.6	412.78	463.6	6	25	205	16	41	-10	15	38
B-232 A20	800	150	169	520	463.6	412.78	463.6	6	25	230	16	41	-18	7	38

寸法 Size 型號 Model	K max.	L	L1	M	N	P	Q max	Q min	R max	R min	S	T	U	
B-204	M32 x 1.5	3-M10	16	24	52	14	23	20.3	11.3	6.8	23	10	-	
B-205 A4	M40 x 1.5	3-M10	15	15	31	62	14	26.5	23.8	19.8	7.8	25	10	3-M6
B-206 A5	M55 x 2	6-M10	16	16	37	73	20	32	29.3	22.8	9.3	31	12	3-M6
B-208 A5	M60 x 2	6-M12	20	18	38	95	25	38.7	35	29.8	14.8	35	14	6-M10
B-208 A6	M60 x 2	6-M12	20	18	38	95	25	38.7	35	29.8	14.8	35	14	3-M6
B-210 A6	M85 x 2	6-M16	22	18	43	110	30	51	46.6	33.8	14.3	40	16	6-M12
B-210 A8	M85 x 2	6-M16	22	24	43	110	30	51	46.6	33.8	14.3	40	16	3-M8
B-212 A8	M100 x 2	6-M16	23	25	51	130	30	61.3	56	45.8	15.8	50	21	3-M8
B-215 A11	M130 x 2	6-M20	30	28	66	165	43	82	76.7	46.8	13.8	62	22	3-M10
B-218 A11	M130x2	6-M20	35	28	66	165	43	82	76.7	79.75	15.25	62	22	3-M10
B-220 A15	M190x3	6-M24	35	33	73	180	60	112.5	107.2	60.5	24.5	64	25	3-M12
B-224 A20	M215x3	6-M24	35	35	73	180	60	139.9	133.9	87.5	24.5	64	25	3-M10
B-232 A20	M250x3	6-M24	35	35	73	180	60	162	153	153.5	24.5	64	25	3-M10

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
 * 非標需求可訂做 Non-standard requirements can be made