


> BT SERIES

中空動力夾頭(二爪高速中空型)

2-JAW THOUGH HOLE POWER CHUCK

- ◎ 楔形二爪大貫通孔徑，特別適合异形物的夾持。
- ◎ 摺動面均經硬化及精密研磨，并直接潤滑。
- ◎ 高剛性結構及高夾持精度。
- ◎ It's a WEDGE-HOOK type 2-jaw with the large through-hole.
- ◎ Matching surfaces of all parts hardened,ground and lubricated directly.
- ◎ Construction of high rigidity and high clamping accuracy.

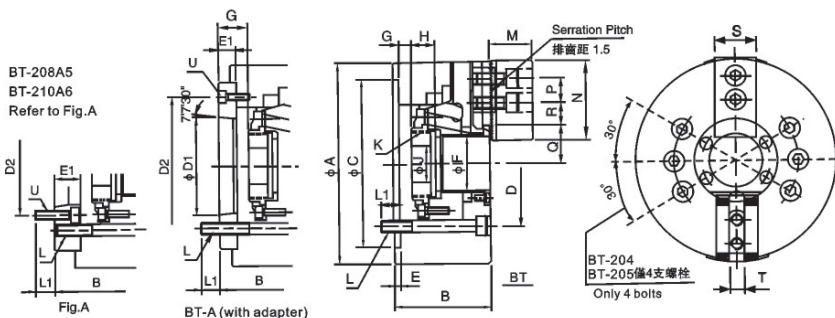

規格 Spec 型號 Model	楔心行程(mm) Plunger stroke	爪行程(直徑) Jaw stroke (Dia.) (mm)	夾持直徑 chucking Dia.(mm)		容許油壓缸推力 Max.D.B.Pull (kgf)	最大夾持力 Max clamping force (kgf)	最高回轉速 max r.p.m	慣性矩 kg·m ²	重量 (kg) Weight		適合油壓缸 Matched cylinders
			最大Max	最小Min							
BT-204			110	7	940	1930	8000	0.01	3.8		H-0928
BT-205 A4	10	5.4	135	12	1190	2440	7000	0.02	6.5 7.3		H-1036
BT-206 A5	12	5.5	169	15	1470	3870	6000	0.06	11.5 13.3		H-1246
BT-208 A5	16	7.4	210	13	2360	5840	5000	0.17	21.3	24.2	H-1552
BT-208 A6										22.4	
BT-210 A6	19	8.8	254	31	2900	7540	4200	0.31	33.5	40.5	H-1875
BT-210 A8										39	
BT-212 A8	23	10.6	304	34	3740	9780	3300	0.70	59.7	62.7	H-2091
BT-215 A11			381	50	4790	12200	2500	2.23	115	122	H-2511
BT-218 A11	23	10.6	450	50	4823	12236	2000	3.31	122	133	H-2511

寸法 Size 型號 Model	A	B	C(H6)	D	D1	D2	E	E1	F	Gmax	Gmin	H	J			
BT-204	110	59	85	70.6	-	-	-	-	26	3.5	-6.5	17.5	12			
BT-205 A4	135	60	71	110	82.6	63.51	96	4	15	33	1	16	-9	6	20	20
BT-206 A5	169	81	91	140	104.8	82.56	116		45	11	26	-1	14	19	20	
BT-208 A5	210	91	109	170	133.4	106.38	150	5	23	52	14.5	37.5	-1.5	21.5	20.5	30
BT-208 A6			17						52	14.5	31.5	-1.5	15.5	20.5	30	
BT-210 A6	254	100	120	220	171.5	133.4	190	5	25	75	8.5	33.5	-10.5	14.5	25	45
BT-210 A8			113						220	171.5	139.72	190	18	75	8.5	26.5
BT-212 A8	304	110	122					6	91	8	26	-15	3	28	50	
BT-215 A11	381	133	149	300	235	196.87	260	6	22	117.5	11	33	-12	10	39	60
BT-218 A11	450	133	149	300	235	196.869	260	6	22	117.5	7	29	-16	6	43	-

寸法 Size 型號 Model	K max	L	L1	M	N	P	Q max	Q min	R max	R min	S	T	U	
BT-204	M32×1.5		16	24	52		23	20.3	11.3	6.8	23	10	-	
BT-205 A4	M40×1.5	3-M10	15	15	31	62	14	26.5	23.8	19.8	7.8	25		
BT-206 A5	M55×2	6-M10	16	16	37	73	20	32	29.3	22.8	9.3	31	12	3-M6
BT-208 A5	M60×2	6-M12	20	18	38	95	25	38.7	35	29.8	14.8	35	14	6-M10
BT-208 A6														3-M6
BT-210 A6	M85×2	6-M16	22	24	43	110	30	51	46.6	33.8	14.3	40	16	6-M12
BT-210 A8														3-M6
BT-212 A8	M100×2		23	25	51	130		61.3	56	45.8	15.8	50	21	3-M8
BT-215 A11	M130×2	6-M20	30	28	66	165	43	82	76.7	46.8	13.8	62	22	4-M10
BT-218 A11	M130x2	6-M20*135	30	28	66	165	43	82	76.7	79.75	15.25	62	22	3-M10

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
 * 非標需求可訂做 Non-standard requirements can be made

